


Receiver Hitch Mounting Instructions

Yamaha '07-15 Grizzly 550/700

Item	Qty.	Part#	Description
1	1	1172	1172 Weldment

Instructions:

1. Remove the two bolts holding the stock hitch to the frame (keep the hitch in place on the machine).
2. Remove the two bolts holding the drop bars of the rear rack to the frame.
3. The receiver hitch installs between the frame and rear rack support bars on the top. On the bottom it installs on top of the stock hitch. You may need help pulling the support bars back while sliding the receiver into place.
4. Once in position, bolt into place using the stock bolts. To reinstall the back bolts you may need to use a long extension and a swivel on your socket. Go from behind the top of the hitch down with the extension and swivel and you can tighten the bolts down.

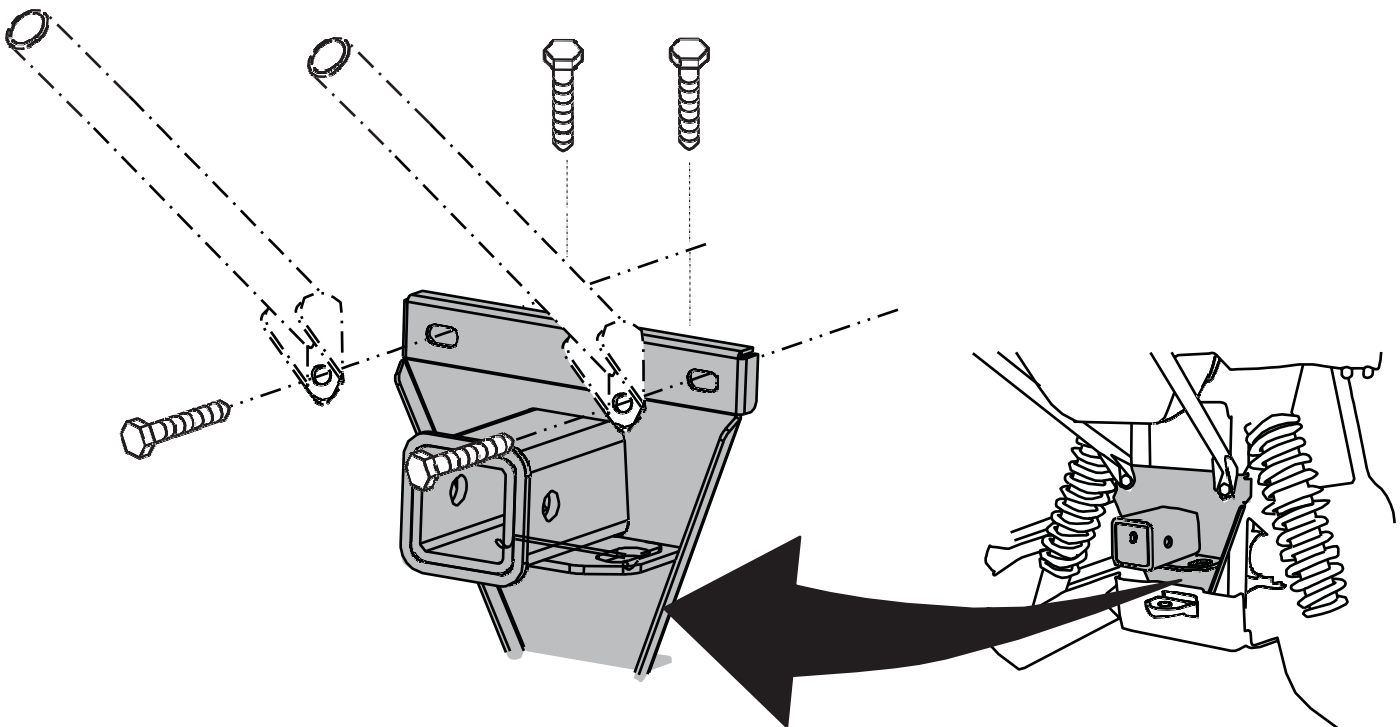

Questions or Comments Call 320-964-1616 Monday thru Thursday 7:00 to 4:30 CST

INST1172