

ITEM	PART#	QTY.	DESCRIPTION
1	5504-70	1	Hitch Weldment
2	HDW1066	4	M10 x 20mm Hex Bolt
3	HDW9029	6	3/8 USS Flat Washer

RECEIVER HITCH FOR YAMAHA GRIZZLY

Remove the stock ball hitch from machine.


You will line up hitch with the hole location from the ball hitch and then the side location which are on the side of the frame tubes.

Some machine may require a washer on each side between the hitch and frame side location if there is a gap.

You will use hardware provided with hitch in all 4 locations.


Re-tighten after usage.

Do not exceed the manufacture towing capacity.

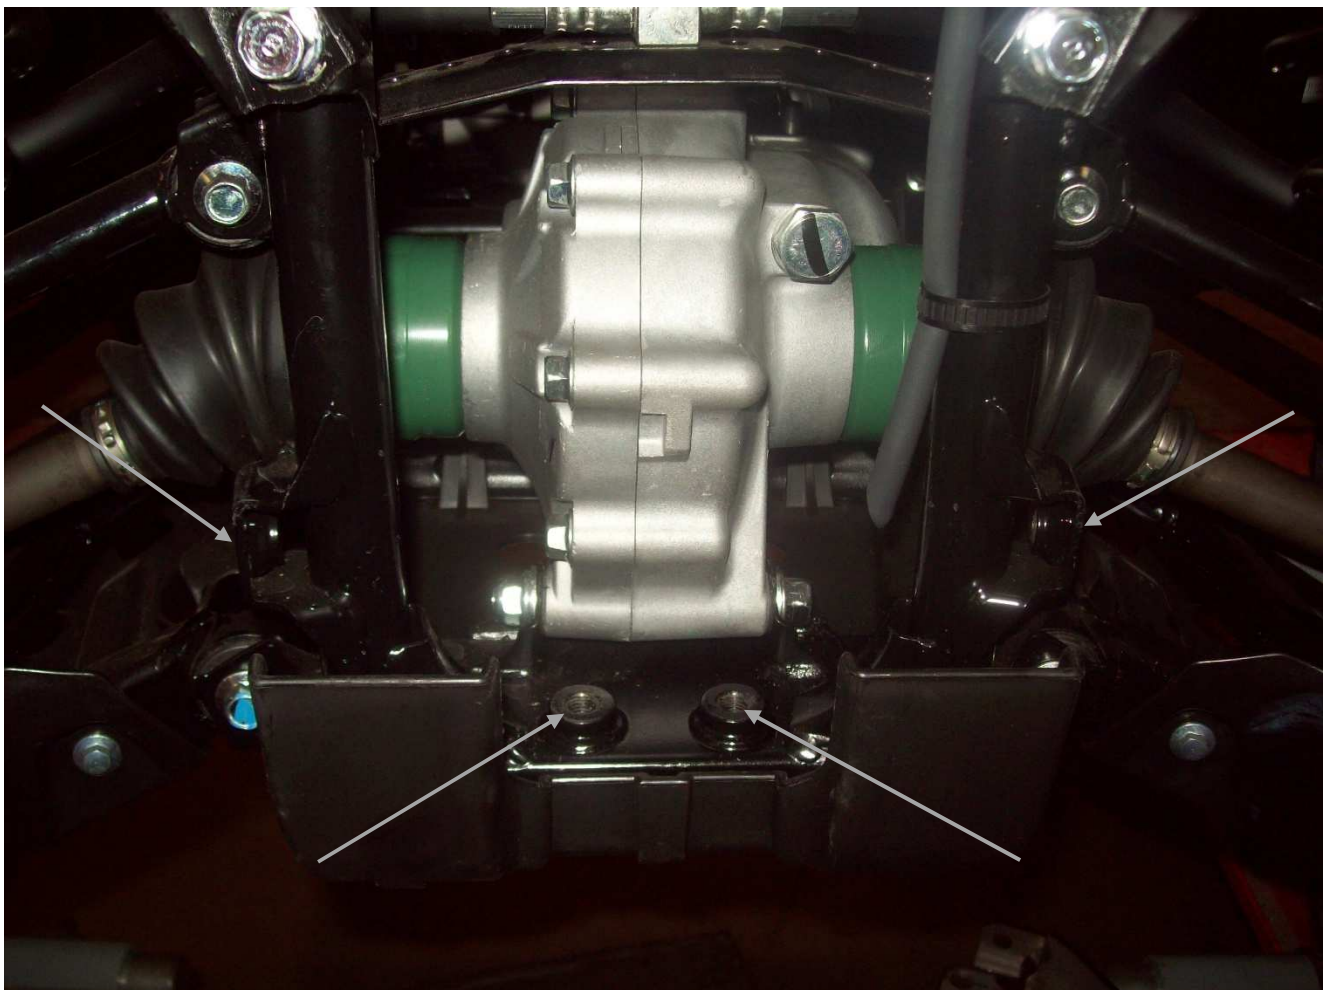



Stock hitch location holes

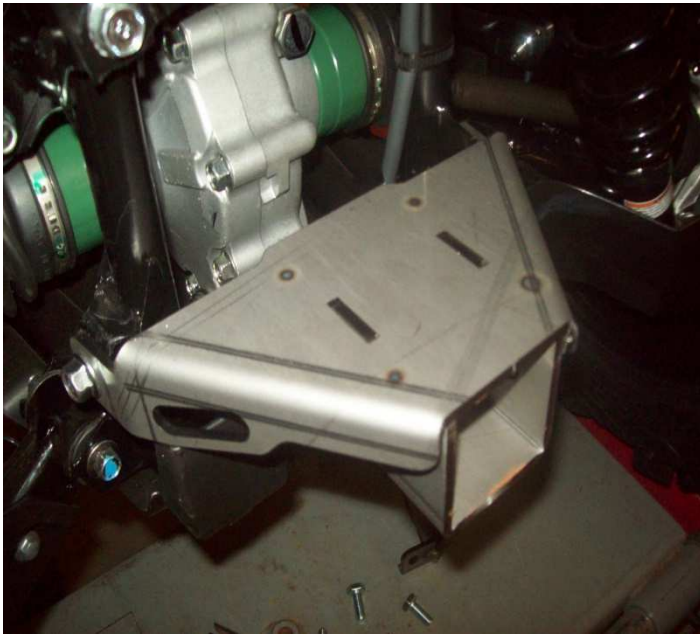

Receiver hitch installed and top mounting locations